


ECN	REV	DESCRIPTION	DATE	APPROVED
2021102302	A1	外壳、电缆套换成新款	10/23/2021	

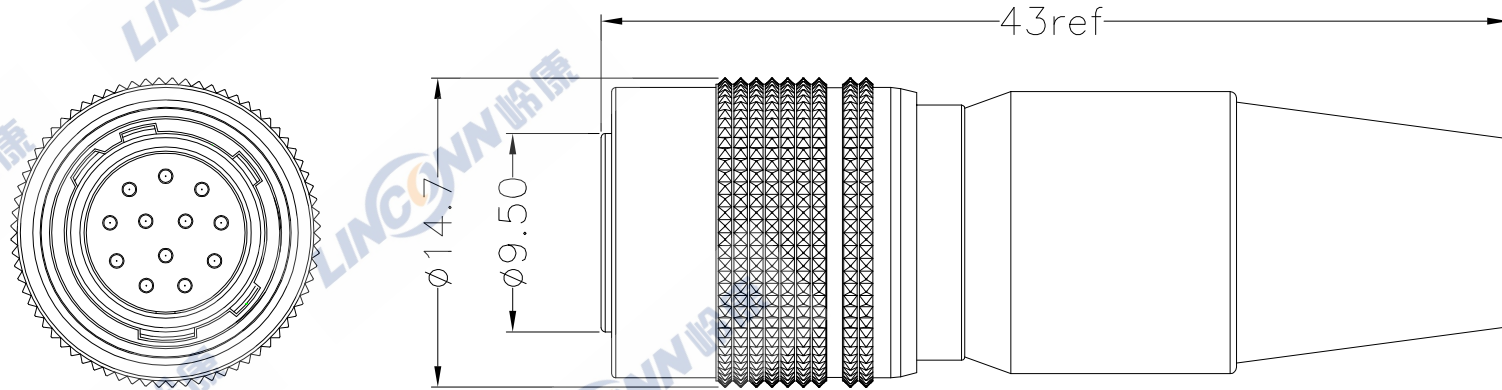

Shell size	10 size	
Contact arrangement		
N0. of pins	10	12

Part number GL10 A -10 P -12 P

Series name _____
 Type A:Low-cost model _____
 Shell size:Plug mating _____
 part outside diameter in mm _____
 Shell type P:Plug J:Jack R:Receptacle _____
 Number of contacts _____
 Type of terminal P:Male terminal S:Female terminal _____

技术特性/Technical Characteristics

- 1.寿命/Durability: >500 mate/unmate cycles
- 2.额定电流/Current rating : 2A
- 3.接触电阻/Contact resistance:10mΩ
- 4.绝缘电阻/Insulation resistance : 100MΩ
- 5.温度等级/Rated Temperature: -20℃,+80℃
- 6.盐雾/Corrosion Resistance: Salt spray test>48h

9	护套/Bushing: PTU Black
8	线夹/Collet: 黄铜Brass
7	螺丝/Screw: 黄铜镀镍/Brass Nickel Plated
6	公针/Pin : 黄铜镀金/Brass gold plated
5	绝缘体/Insulator:PA66+GF, Black
4	弹簧/Spring : 不锈钢/Stainless Steel
3	插头外壳/Plug Shell: 锌合金镀镍/Zinc alloy Nickel Plated
2	外壳/Body: 黄铜镀镍/Brass Nickel Plated
1	外壳/Shell: 黄铜镀镍/Brass Nickel Plated
ITEM	SPECIFICATION

	SCALE	TOLERANCES ARE: DECIMALES ANGLES	
	F	±	
SHEET	DIMENSION	APPROVALS	DATE
1 OF 1	MM	APPROVED:	
DWG NO.	REV.	CHECKED:	
	A1	DRAWN:	pengsen 10/23/2021

TITLE: Plug(Solder type)

PART NO. GL10A-10P-12P

REV. *

LINCONN Linconn Etc Tech Co.,LTD

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作