
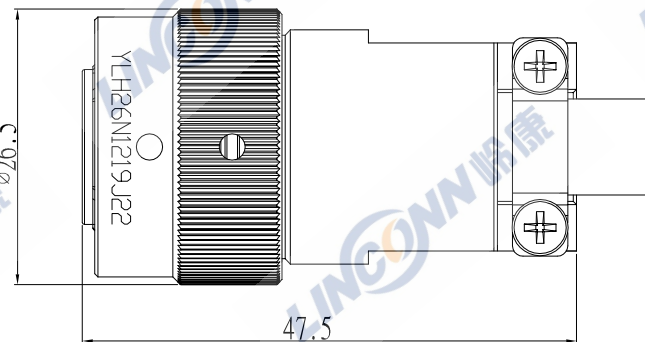



1. 芯数/NO. of contacts

系列/Series	1203a	1207	1208	1210	1219
孔位排列/Pin Number					
导体直径/Pin size	1.59mm	1.02mm	1.02mm	1.02mm	0.8mm
额定电流/Rated current	13A	7.5A	7.5A	7.5A	2A
额定电压/Rated voltage	300V	300V	300V	300V	200V

2. 编码原则/Part Number

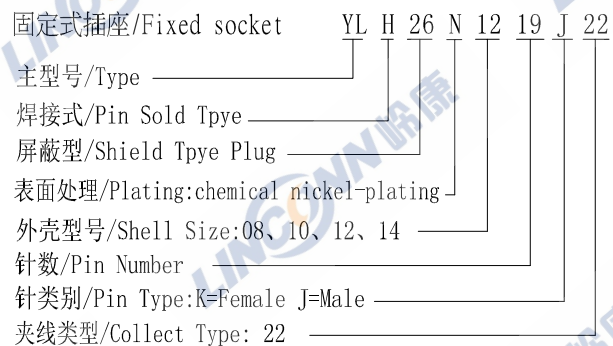

技术特性/Technical Characteristics

1. 寿命/Durability: >500 mate/unmate cycles
2. Pin接触电阻/ Pin Contact Resistance: ≤10 mΩ
3. 绝缘电阻/Insulation Resistance: ≥ 100 MΩ
4. 温度等级/Rated Temperature: -25° C, +80° C

	SCALE	TOLERANCES ARE: DECIMALES ANGLES X ± 0.2 .XX ± 0.1		TITLE: 浮动式插头/Free Plug	
	F				
SHEET	DIMENSION	APPROVALS	DATE	PART NO.	REV.
1 OF 1	MM	APPROVED:		YLH26N1219J22	*
DWG NO.	REV.	CHECKED:		LINCINN Linconn Elc Tech Co.,LTD	
YL	A0	CHECKED:			
		DRAWN: pengsen	07/24/2020		