

ECN	REV	DESCRIPTION	DATE	APPROVED



1. 芯数/NO. of contacts

系列/Series	303	304	305	306
孔位排列/Pin Number				
适配线缆/Conductor size	24AWG	24AWG	24AWG	26AWG
导体直径/Pin size	1.0mm	1.0mm	1.0mm	0.7mm
额定电流/Rated current	3A	3A	3A	1A
额定电压/Rated voltage	60V	30V	30V	30V

2. 绝缘体型号/Insulator Coded

Coded	A	B
型号		

3. 编码原则/Part Number

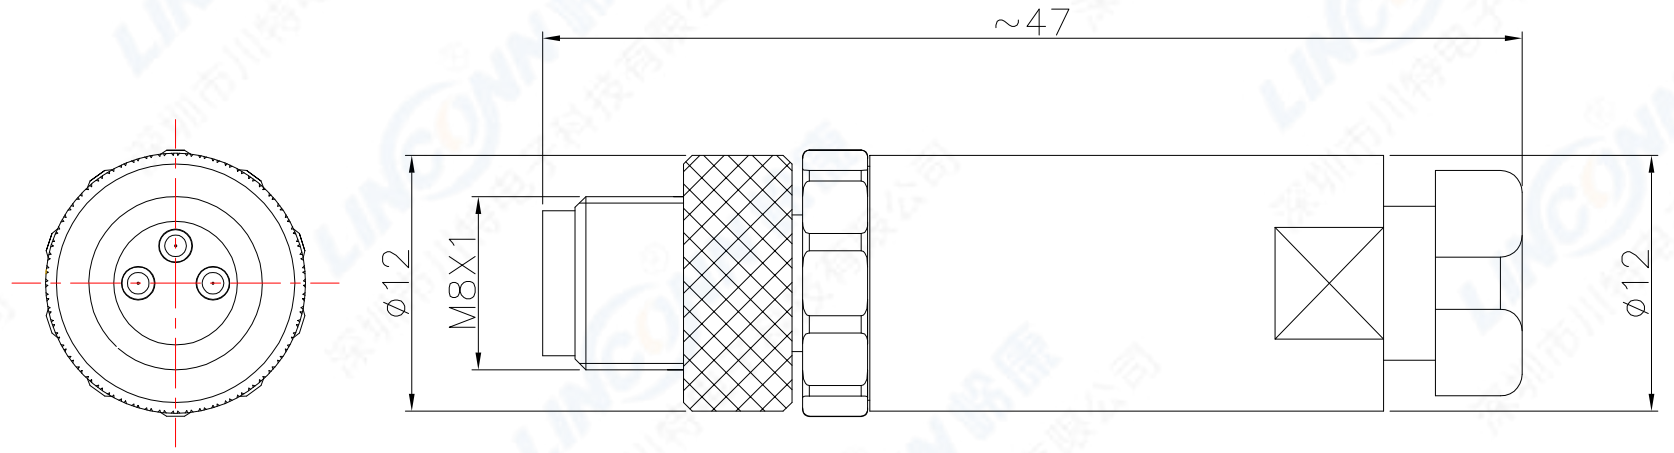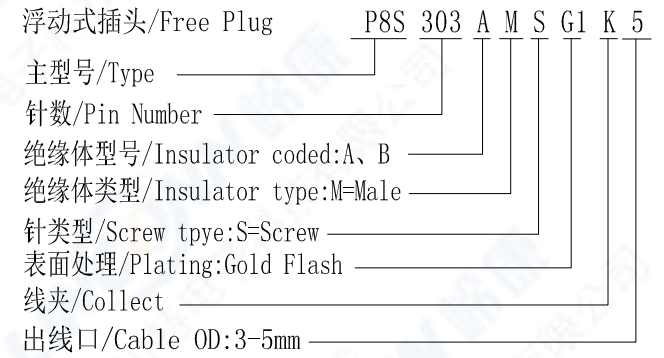

4. 技术特性/Technical Characteristics

- 1. 寿命/Durability: >1000 mate/unmate cycles
- 2. Pin接触电阻/ Pin Contact Resistance: ≤10 mΩ
- 3. 绝缘电阻/Insulation Resistance: ≥ 100 MΩ
- 4. 温度等级/Rated Temperature: -25°C,+80°C
- 5. 盐雾/Corrosion Resistance: Salt spray test,>48h
- 6. 防水等级/Waterproof: IP67

	SCALE	TOLERANCES ARE: DECIMALES ANGLES X±0.2 XX±0.1		TITLE: 浮动式插头/Free Plug	
	F				
SHEET	DIMENSION	APPROVALS	DATE	PART NO.	REV.
1 OF 1	MM	APPROVED:		P8S303AMSG1K5	*
DWG NO.	REV.	CHECKED:		LINGONN Linconn Elc Tech Co.,LTD	
P8S	A0	CHECKED:			
		DRAWN: S.peng	03/24/2014		