

ECN	REV	DESCRIPTION	DATE	APPROVED

1. 芯数/NO. of contacts

系列/Series	303	304	305	306	308
孔位排列/Pin Number					
适配线缆/Conductor size	24AWG	24AWG	24AWG	26AWG	26AWG
导体直径/Pin size	1.0mm	1.0mm	1.0mm	0.7mm	0.6mm
额定电流/Rated current	3A	3A	3A	1A	1A
PCB 孔位/PCB Layout (Front View)					


2. 绝缘体型号
Insulator Coded

Coded	
A	
B	



3. 编码原则/Part Number

固定式插座/Fixed socket M8H 4 304 A F V B G1 (S)
 主型号/Type _____
 外观/Appearance: 4 _____
 针数/Pin Number _____
 绝缘体型号/Insulator coded: A, B _____
 绝缘体类型/Insulator type: F=Female _____
 针类型/Sold Type: V _____
 针长度/Pin Length: B=Standard _____
 表面处理/Plating: Gold Flash _____
 屏蔽/Shielded _____

4. 面板开孔/RECOMMENDED PANEL CUT-OUT



"▲" Insulator key

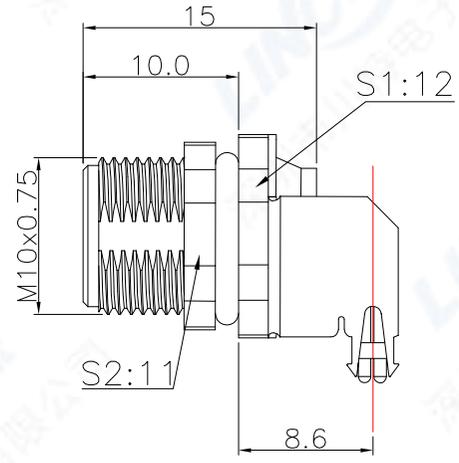

5. 技术特性/Technical Characteristics

- 寿命/Durability: >1000 mate/unmate cycles
- Pin接触电阻/ Pin Contact Resistance: ≤10 mΩ
- 绝缘电阻/Insulation Resistance: ≥ 100 MΩ
- 温度等级/Rated Temperature: -25° C, +80° C
- 盐雾/Corrosion Resistance: Salt spray test, >48h
- 防水等级/Waterproof: IP67

6	屏蔽壳/Shield Shell: 黄铜镀金/Brass, G/F
5	六角螺母/Hexagonal nut: 黄铜镀镍/Brass, Nickel plated
4	母针芯/PIN: 磷铜镀金/Phosphor copper, G/F
3	外壳/Outer Shell: 黄铜镀镍/Brass, Nickel plated
2	密封圈/O-RING: Rubber
1	绝缘体/Insulator: PA BLACK
序号/ITEM	名称 & 规格/Name & Description

SHEET	SCALE	TOLERANCES ARE:		DATE
	F	DECIMALES	ANGLES	
1 OF 1	DIMENSION	· X ± 0.2 · XX ± 0.1		APPROVALS
DWG NO.	REV.	APPROVED:		CHECKED:
M8H	A0	CHECKED:		CHECKED:
		DRAWN: pengsen		03/24/2014

TITLE: 固定式插座/Fixed socket
 PART NO. M8H4304AFVBG1 (S)
 REV. *

LINCONN Linconn Elec Tech Co., LTD

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作