


ECN	REV	DESCRIPTION	DATE	APPROVED





1. 芯数/NO. of contacts

芯数/NO. of pins	3	4	6	8
孔位排列/Pin Number				
适配线缆/Conductor size max.	22AWG	22AWG	22AWG	22AWG
额定电流/Rated current	2A	2A	2A	2A
额定电压/Rated voltage	100V AC	100V AC	100V AC	100V AC

4. 开孔尺寸/Panel cut out



2. 编码原则/Part Number

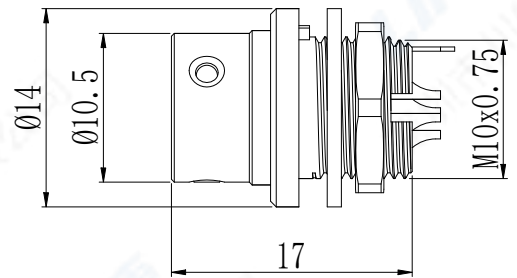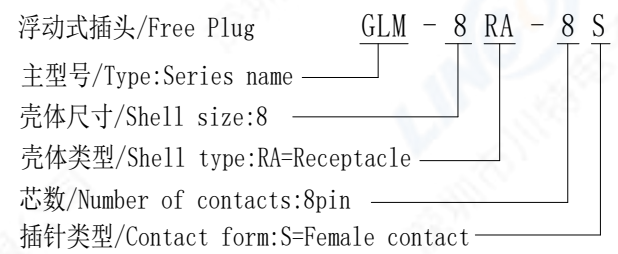

3. 技术特性/Technical Characteristics

- 寿命/Durability: >500 mate/unmate cycles
- Pin接触电阻/ Pin Contact Resistance: ≤10 mΩ
- 绝缘电阻/Insulation Resistance: ≥ 100 MΩ
- 温度等级/Rated Temperature: -25° C, +80° C

5	垫圈/Locking washer: 不锈钢/Stainless Steel
4	六角螺母/Hexagonal nut: 黄铜镀镍/Brass, Nickel plated
3	母针芯/PIN: 铜合金镀金/Brass, G/F
2	绝缘体/Insulator:PA66 black
1	外壳/Shell:锌合金镀镍/Zinc alloy Nickel Plated
序号ITEM	名称 & 规格/Name & Description

	SCALE	TOLERANCES ARE: DECIMALES ANGLES X±1 ± · X±0.5		TITLE: Receptacle(Solder type)	
	F				
SHEET	DIMENSION	APPROVALS		DATE	
1 OF 1	MM	APPROVED:			
DWG NO.	REV.	CHECKED:			
GLM	A0	DRAWN: pengsen		08/12/2022	
				PART NO. GLM-8RA-*S	
				REV. *	
				Linconn Elc Tech Co.,LTD	