



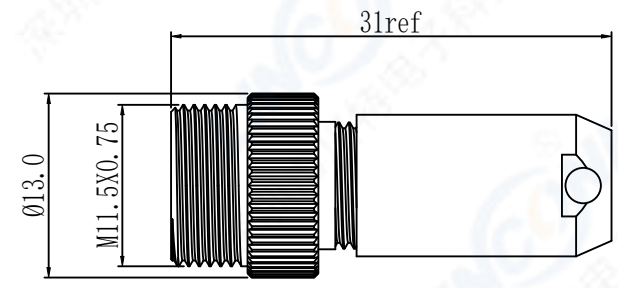



ECN	REV	DESCRIPTION	DATE	APPROVED

1. 芯数/NO. of contacts

芯数/NO. of pins	4	6	7
孔位排列/Pin Number			
适配线缆/Conductor size max.	22AWG	22AWG	22AWG
额定电流/Rated current	1A	1A	1A
额定电压/Rated voltage	100V AC	100V AC	100V AC

2. 编码原则/Part Number

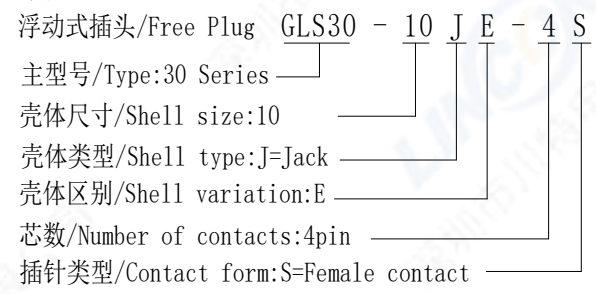


3. 技术特性/Technical Characteristics


- 寿命/Durability: >500 mate/unmate cycles
- Pin接触电阻/ Pin Contact Resistance: ≤10 mΩ
- 绝缘电阻/Insulation Resistance: ≥ 100 MΩ
- 温度等级/Rated Temperature: -25° C, +80° C

7	护套/Bushing: PTE Black
6	线夹/Collet: 黄铜/Brass
5	螺丝/Screw: 碳钢发黑/Steel black
4	母针芯/PIN: 铜合金镀金/Brass, G/F
3	绝缘体/Insulator: PA66+GF
2	外壳/Body: 黄铜镀镍/Brass Nickel Plated
1	外壳/Socket Shell: 黄铜镀镍/Brass Nickel Plated
序号ITEM	名称 & 规格/Name & Description

附件/Accessories

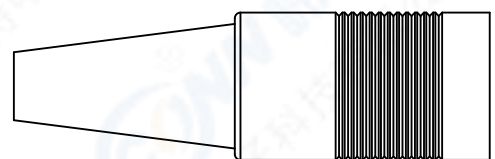

护套/Bushing



线夹/Collet



螺丝/Screw

SCALE		TOLERANCES ARE:		TITLE:	
SHEET	DIMENSION	DECIMALES	ANGLES	PART NO.	REV.
1 OF 1	MM	X ± 1	±	GLS30-10JE-xS	*
DWG NO.	REV.	APPROVALS	DATE	LINCINN Linconn Elc Tech Co.,LTD	
GLS30	A0	CHECKED:			
		CHECKED:			
		DRAWN: pengsen	08/12/2022		