


ECN	REV	DESCRIPTION	DATE	APPROVED

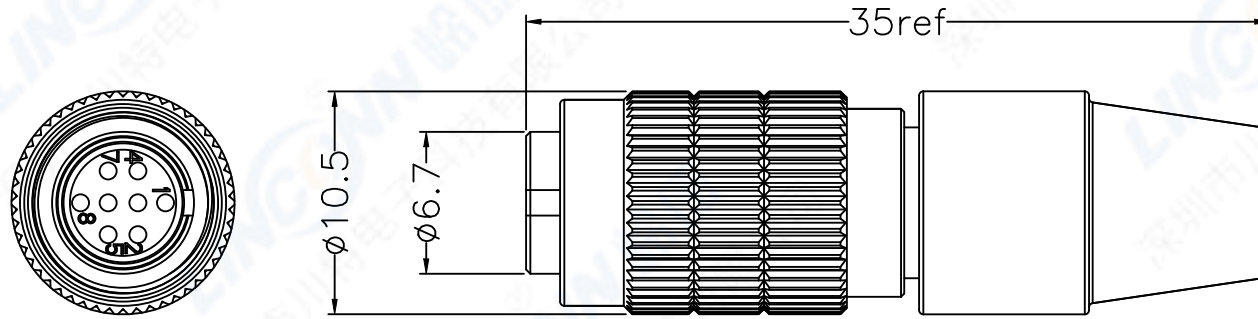

Major Ratings

1. Withstand voltage: 100V AC for 1minute
2. Current capacity: 1A
3. Contact resistance: 30mΩ

Shell size	7 size		
Contact arrangement			
NO. of pins	4	6	8

Part number

GL25-7TP-8P\*

Model:Indicates the HR25 Series

Shell size:Indicates the outer diameter of the engaging portion of the Plug

Classification of lock mechanism:Indicated as described below

T:Screw lock system No symbol:Push-pull lock system

Classification of shell P:Plug J:Jack R:Receptacle

Number of contacts

Form of contacts:As described below  
P:Male contacts S:Female contacts

Type of contacts:The wiring system used or the type of contacts are classified in alphabetical order:

- Example None:Solder termination  
C:Crimp-style contacts  
A: PCB dip termination

8	护套/Bushing: PTU Black
7	线夹/Collet:黄铜Brass
6	螺丝/Screw:黄铜镀镍/Brass Nickel Plated
5	公针/Pin :黄铜镀金/Brass gold plated
4	绝缘体/Insulator:PA66+GF, Black
3	固定环/Retaining ring :黄铜镀镍/Brass Nickel Plated
2	外壳/Body:黄铜镀镍/Brass Nickel Plated
1	外壳/Shell:黄铜镀镍/Brass Nickel Plated

	SCALE	F
	SHEET	
1 OF 1	MM	
DWG NO.	REV.	
GL25	A0	

TOLERANCES ARE:		ANGLES
DECIMALES	. X ± 0.3	±
	. XX ± 0.15	
APPROVALS	DATE	
APPROVED:		
CHECKED:		
CHECKED:		
DRAWN:		

TITLE: Plug(Solder type)	
PART NO. GL25-7TP-8P	REV. *
Linconn Elc Tech Co.,LTD	

ITEM	SPECIFICATION
------	---------------