

ECN	REV	DESCRIPTION	DATE	APPROVED

Part number **GL25- 9 T P -20 P**

Model:Indicates the HR25 Series



Shell size:Indicates the outer diameter of the engaging portion of the Plug

Classification of lock mechanism:Indicated as described below  
T:Screw lock system No symbol:Push-pull lock system

Classification of shell P:Plug J:Jack R:Receptacle

Number of contacts

Form of contacts:As described below  
P:Male contacts S:Female contacts

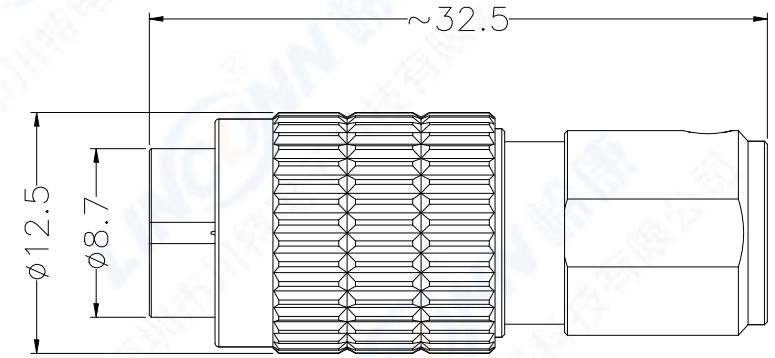

Shell size	9 size		
Contact arrangement			
NO. of pins	12	16	20
Withstand voltage	100V AC for 1minute		
Current capacity	1A		
Contact resistance	30mΩ		

8	护套/Bushing: PTE Black
7	线夹/Collet:黄铜/Brass
6	螺丝/Screw:碳钢发黑/Steel black
5	公针/Pin :黄铜镀金/Brass gold plated
4	绝缘体/Insulator:PA66+GF, Black
3	插头/Plug shell :黄铜镀镍/Brass Nickel Plated
2	外壳/Body:黄铜镀镍/Brass Nickel Plated
1	螺纹外壳/Nut shell:黄铜镀镍/Brass Nickel Plated
ITEM	SPECIFICATION

附件/Accessories	
护套/Bushing	线夹/Collet
	螺丝/Screw
TOLERANCES ARE: DECIMALES ANGLES · xx± · xx±	
TITLE: Plug(Solder type)	
PART NO. GL25-9TP-xxP	
REV. *	
APPROVALS	
APPROVED:	DATE
CHECKED:	
CHECKED:	
DRAWN: pengsen	06/01/2020

	SCALE
	F
SHEET	DIMENSION
1 OF 1	MM
DWG NO.	REV.
GL25	A0