


A B C D E F G H I J


ECN	REV	DESCRIPTION	DATE	APPROVED

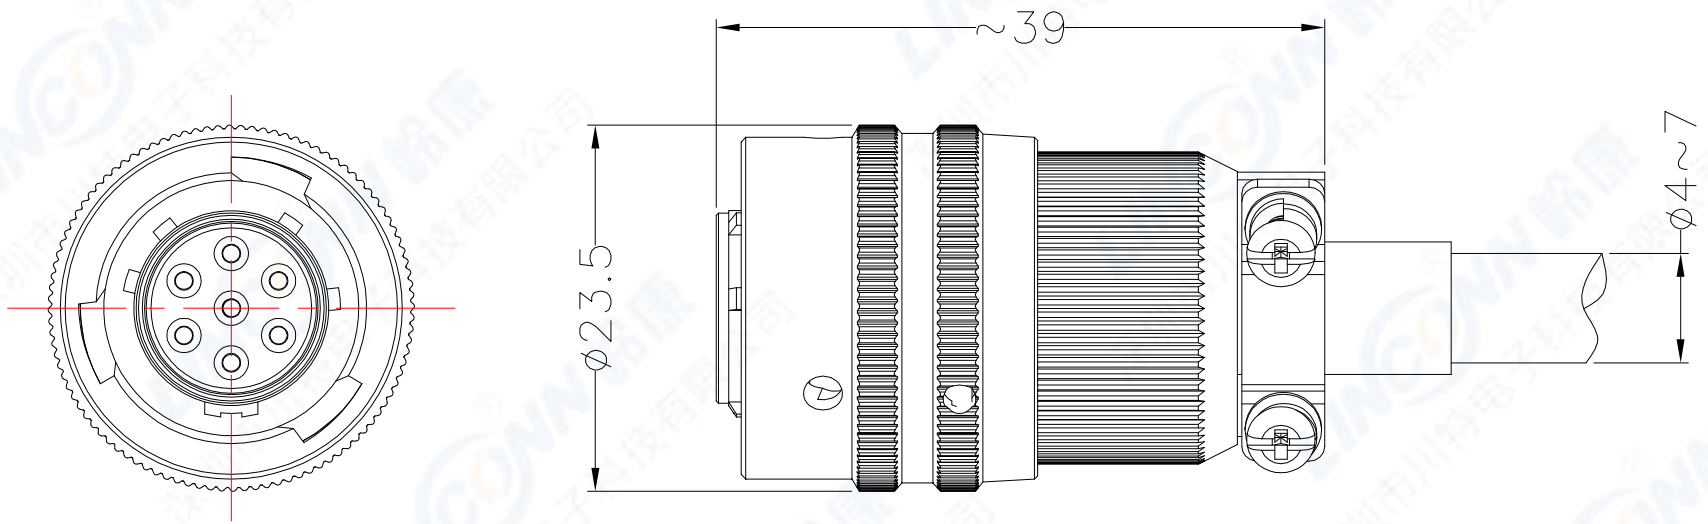

技术特性/Technical Characteristics

- 1. 寿命/Durability: >500 mate/unmate cycles
- 2. Pin接触电阻/ Pin Contact Resistance: ≤10 mΩ
- 3. 绝缘电阻/Insulation Resistance: ≥ 100 MΩ
- 4. 温度等级/Rated Temperature: -25° C, +80° C

4	护套/Bend relief:Rubber
3	外壳/Outer Shell: 铝合金阳极黑色/Aluminium alloy, Anodizing back
2	绝缘体/Insulator: PBT
1	母针芯/PIN: 磷铜镀金/Phosphor copper, G/F
序号ITEM	名称 & 规格/Name & Description

	SCALE
	F
SHEET	DIMENSION
1 OF 1	MM
DWG NO.	REV.
Y50X	A0

TOLERANCES ARE:		ANGLES
DECIMALES	X ± 0.2	±
	.XX ± 0.1	
APPROVALS	DATE	
APPROVED:		
CHECKED:		
CHECKED:		
DRAWN:	S.peng	03/29/2018

TITLE: 浮动式插头/Free Plug	
PART NO. Y50X-1007TK2	REV. *
 Linconn Elc Tech Co.,LTD	

A B C D E F G H I J