

ECN	REV	DESCRIPTION	DATE	APPROVED

1) 00S系列推拉自鎖連接器簡介

00S series connectors provide the following main features:

- security of the Push-Pull self-latching system
- solder or print contacts (straight or elbow)
- 360° screening for full EMC shielding.
- coax impedance: 50 ohms
- cable type: RG 316 /U

2) 技術特性/Technical Characteristics

使用環境/Environment: 室內/Indoor


接口密封/Ingress protection: IP50

溫度等級/Rated Temperature: -25°, +150°


額定電流/Rated current: 4A

壽命/Max. Matings: 500

鹽霧/Corrosion Resistance: Salt spray test > 144h

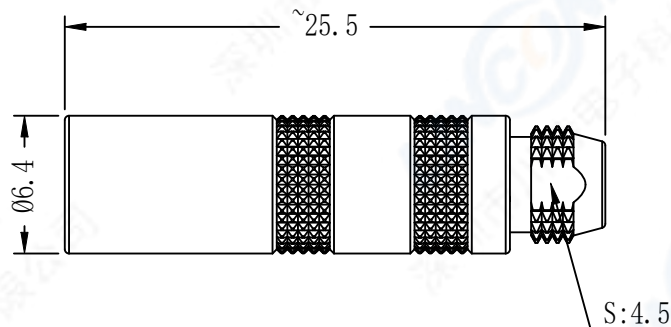

6	尾螺帽/Collect Nut: 黃銅鍍鉻/Brass, Chrome plated
5	線夾/Collect: 黃銅鍍鎳/Brass, Nickel plated
4	固定件/Centre-piece: 黃銅鍍鎳/Brass, Nickel plated
3	外殼/Outer Shell: 黃銅鍍鉻/Brass, Chrome plated
2	絕緣體/Insulator: PTFE
1	母針芯/Pin: 磷銅鍍金/Phosphor copper, Gold plated
序號 ITEM	名稱 & 規格/Name & DESCRIPTION

	SCALE
	F
SHEET	DIMENSION
1 OF 1	MM
DWG NO.	REV.
TCA00	A0

TOLERANCES ARE:	
DECIMALES $\begin{matrix} X \pm \\ X \pm \\ X \pm \end{matrix}$	ANGLES $\begin{matrix} \pm \\ \pm \end{matrix}$
APPROVALS	DATE
APPROVED:	
CHECKED:	
CHECKED:	
DRAWN: pengsen	10/25/2020

TITLE: 浮動式插座/Free socket	
PART NO. TCA 00 250 CTLC32	REV. *
 Linconn Etc Tech Co.,LTD	