

ECN	REV	DESCRIPTION	DATE	APPROVED


1) OS series connectors provide the following main features:

- security of the Push-Pull self-latching system
- solder or print contacts (straight or elbow)
- polarisation by stepped insert(half-moon) fitted with male and female contacts
- 360° screening for full EMC shielding.



2) Specifications

Contact Type: Coaxial 50 Ohm (Solder)  
 Contact Dia. : 0.9 mm  
 Rated Current: 6 Amps  
 Max. Matings: 500  
 Temp (min / max): -25° C / +150° C  
 Salt Spray Corrosion: >144 hr  
 IP Rating: 50

Cable type: RG 178 B/U, RG 196 A/U, RG 188 A/U, RG 316 B/U, RG 174 A/U,  
 HF-2114, RG 122 /U

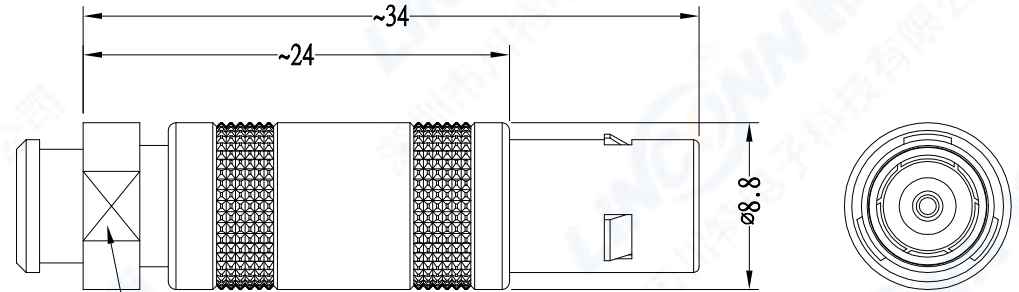



3) 編碼原則/Part Number

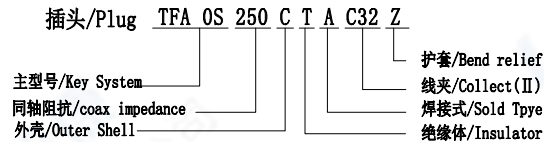

护套/Bend relief  
SCALE 1:2

7	尾螺帽/Collect Nut: 黄铜镀铬/Brass, Chrome plated
6	线夹/Collect: 黄铜镀镍/Brass, Nickel plated
5	固定件/Centre-piece: 黄铜镀镍/Brass, Nickel plated
4	外壳/Outer Shell: 黄铜镀铬/Brass, Chrome plated
3	锁定套筒/Latch Sleeve: 磷铜镀镍/Phosphor copper, Nickel plated
2	绝缘体/Insulator: PTFE
1	公针芯/Pin: 黄铜镀金/Brass, Gold plated
序号 ITEM	名称 & 规格/Name & DESCRIPTION

	SCALE	TOLERANCES ARE: DECIMALES ANGLES	
	F	x±     °±	
SHEET	DIMENSION	APPROVALS	DATE
1 OF 1	MM	APPROVED:	
DWG NO.	REV.	CHECKED:	
TFAOS	A0	CHECKED:	
		DRAWN: pengsen	24/03/2014

TITLE: 插头/Plug	
PART NO. TFA OS 250 CTACZ	REV. *
 <b>L inconn E lc Tech C o.,L TD</b>	