

ECN	REV	DESCRIPTION	DATE	APPROVED

1) 00S系列推拉自鎖連接器簡介

00S series connectors provide the following main features:

- security of the Push-Pull self-latching system
- solder or print contacts (straight or elbow)
- 360° screening for full EMC shielding.
- coax impedance: 50 ohms
- cable type: RG 316 /U

2) 技術特性/Technical Characteristics

使用環境/Environment: 室內/Indoor

接口密封/Ingress protection: IP50

溫度等級/Rated Temperature: -25° ,+150°


額定電流/Rated current:4A

壽命/Max. Matings: 500

鹽霧/Corrosion Resistance: Salt spray test>144h

3) 編碼原則/Part Number

插头/Plug TFA 00 250 C T A C32

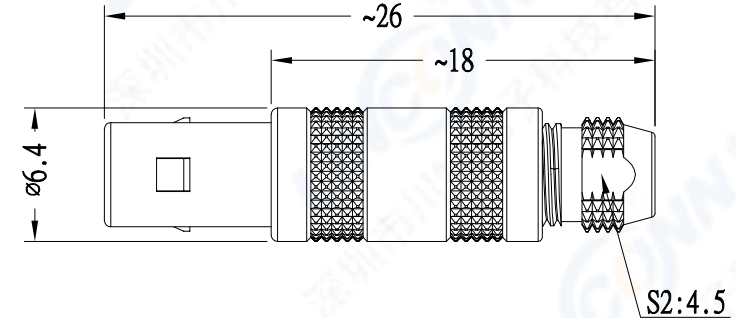

7	尾螺帽/Collect Nut: 黄铜镀铬/Brass, Chrome plated
6	线夹/Collect: 黄铜镀镍/Brass, Nickel plated
5	外壳/Outer Shell: 黄铜镀铬/Brass, Chrome plated
4	固定件/Centre-piece: 黄铜镀镍/Brass, Nickel plated
3	锁定套筒/Latch Sleeve: 磷铜镀镍/Phosphor copper, Nickel plated
2	绝缘体/Insulator: PTFE
1	公针芯/Pin: 黄铜镀金/Brass, Gold plated
序号 ITEM	名称 & 规格/Name & DESCRIPTION

	SCALE	TOLERANCES ARE: DECIMALES ANGLES x± ± -x± ±	
	F		
SHEET	DIMENSION	APPROVALS	DATE
1 OF 1	MM	APPROVED:	
DWG NO.	REV.	CHECKED:	
TFA00	A0	CHECKED:	
		DRAWN: pengsen	26/02/2020

TITLE:	插头/Plug
PART NO.	TFA 00 250 CTAC32
REV.	*
LINCONN L inconn E lc Tech C o.,L TD	