

ECN	REV	DESCRIPTION	DATE	APPROVED

### 1) 00S系列推拉自鎖連接器簡介

00S series connectors provide the following main features:

- security of the Push-Pull self-latching system
- solder or print contacts (straight or elbow)
- 360° screening for full EMC shielding.
- coax impedance: 50 ohms
- cable type: RG 316 /U

### 2) 技術特性/Technical Characteristics

使用環境/Environment: 室內/Indoor


接口密封/Ingress protection: IP50

溫度等級/Rated Temperature: -25° ,+150° °


額定電流/Rated current:4A

壽命/Max. Matings: 500

鹽霧/Corrosion Resistance: Salt spray test>144h

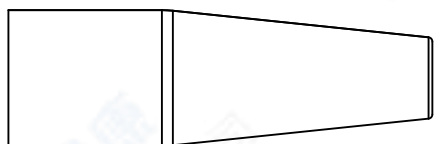

护套/Bend relief

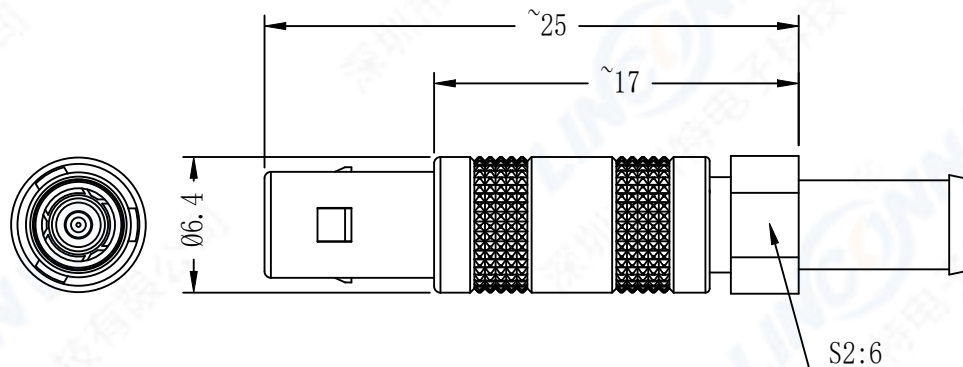

7	尾螺帽/Collect Nut: 黃銅鍍鉻/Brass,Chrome plated
6	線夾/Collect: 黃銅鍍鎳/Brass,Nickel plated
5	外壳/Outer Shell: 黃銅鍍鉻/Brass,Chrome plated
4	固定件/Centre-piece: 黃銅鍍鎳/Brass,Nickel plated
3	鎖定套筒/Latch Sleeve: 磷銅鍍鎳/Phosphor copper ,Nickel plated
2	絕緣體/Insulator: PTFE
1	公針芯/Pin: 黃銅鍍金/Brass,Gold plated
序號 ITEM	名稱 & 規格/Name & DESCRIPTION

	SCALE	TOLERANCES ARE:		TITLE: 插頭/Plug	
	F	DECIMALES x± x±	ANGLES ±		
SHEET	DIMENSION	APPROVALS	DATE	PART NO.	REV.
1 OF 1	MM	APPROVED:		TFA 00 250 CTAC32Z	*
DWG NO.	REV.	CHECKED:		 <b>Linconn Elc Tech Co.,LTD</b>	
TFA00	A0	CHECKED:			
		DRAWN: pengsen	10/25/2020		