


ECN	REV	DESCRIPTION	DATE	APPROVED

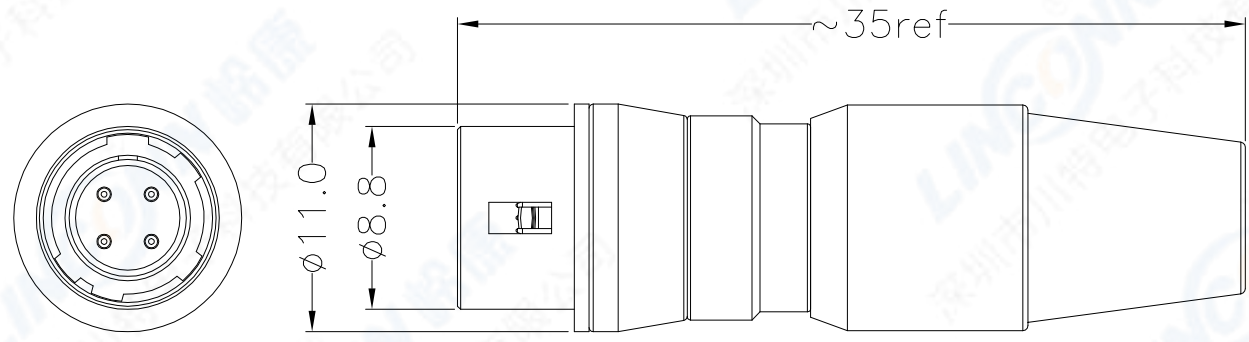

Part number **GL10 A - 7 J - 4 S**

Series name _____
 Type A:Low-cost model _____
 Shell size:Plug mating part outside diameter in mm _____
 Shell type P:Plug J:Jack R:Receptacle _____
 Number of contacts _____
 Type of terminal P:Male terminal S:Female terminal _____

Shell size	7 size		
Contact arrangement			
NO. of pins	4	5	6

技术特性/Technical Characteristics

1. 寿命/Durability: >500 mate/unmate cycles
2. 额定电流/Current rating: 2A
3. 接触电阻/Contact resistance:10mΩ
4. 绝缘电阻/Insulation resistance: 100MΩ
5. 温度等级/Rated Temperature: -20°C,+80°C
6. 盐雾/Corrosion Resistance: Salt spray test>48h

7	护套/Bushing: PTU Black
6	线夹/Collet:黄铜Brass
5	螺丝/Screw:黄铜镀镍/Brass Nickel Plated
4	母针/Female pin: 磷铜镀金/Phosphor copper, gold plated
3	绝缘体/Insulator:PA66+GF, Black
2	插头外壳/Plug Shell:锌合金镀镍/Zinc alloy Nickel Plated
1	外壳/Body:黄铜镀镍/Brass Nickel Plated

SHEET	SCALE	TOLERANCES ARE:	
	F	DECIMALES	ANGLES
1 OF 1	DIMENSION	. X ± 0.3	±
DWG NO.	REV.	. XX ± 0.15	
	A0	APPROVALS	DATE
		CHECKED:	
		CHECKED:	
		DRAWN: pengsen	10/23/2021

TITLE: Plug(Solder type)
PART NO. GL10A-7J-4S
REV. *

LINCONN Linconn Elec Tech Co.,LTD

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作