ECN	REV	DESCRIPTION	DATE	APPROVED

编码原则/Part Number

浮动式插座/Free sockets WKTK-15 J-5 S -C N

- 系列号/Series name
- 壳体尺寸/Shell size
- 壳体类型/Shell type: J=Jack
- 芯数/Number of contacts:5 contact
- 针类型/Type of terminal:S=Female
- 壳体表面处理/Shell plating:C=Natural chrome
  K=Black chrome
- 弹簧/Spring: N=Natural color B=Black

技术特性/Technical Characteristics

1. 寿命/Durability: >100 mate/unmate cycles
2. Rated current & voltage: 0.5A & 60V
3. Pin接触电阻/ Pin Contact Resistance: ≤50 mΩ
4. 绝缘电阻/Nsulation Resistance: ≥ 5000 MΩ
5. 温度等级/Rated Temperature: -25° C,+85° C
6. 防水等级/Waterproof: IP67

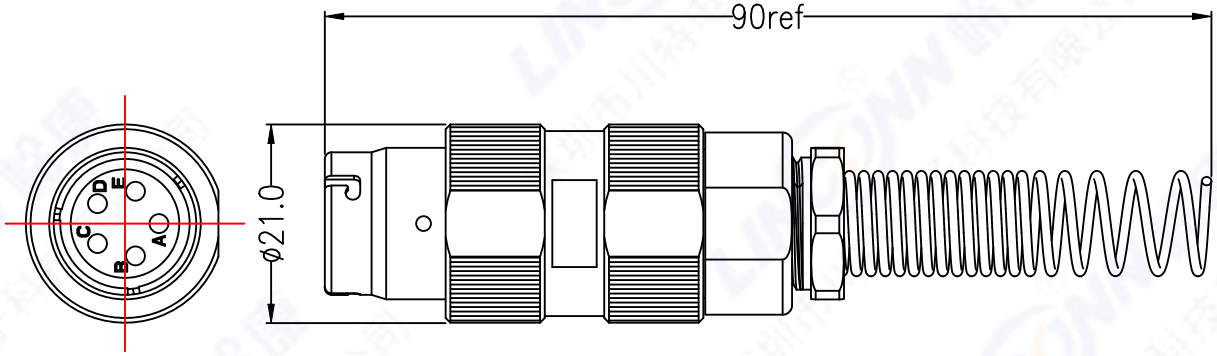

序号ITEM	名称 & 规格/Name & DESCRIPTION
10	尾帽/CABLE NUT: 铝合金/ANODIZING
9	弹簧/SPRING: 钢/STEEL
8	垫片/WASHER: 不锈钢钢/SUS
7	防水塞/RUBBER CASE: 硅胶/SILICON RUBBER
6	螺帽/NUT ADAPTOR: 铝合金/ANODIZING
5	塑胶环/PLASTIC SLEEVE: 铁氟龙/PTFE
4	公针芯/PIN: 黄铜镀金/BRASS,GOLD PLATED
3	绝缘体/INSULATOR: PA66+GF Black
2	外壳/OUTER SHELL: 黄铜镀铬/BRASS,CHROME PLATED BLACK
1	密封圈/O-RING:橡胶/RUBBER

SCALE F	TOLERANCES ARE: DECIMALES x± .x± ANGLES ±	TITLE: 5Pin JACK	
SHEET 1 OF 1	DIMENSION MM	APPROVALS	DATE
		APPROVED:	
		CHECKED:	
DWG NO. U228U	REV. A0	CHECKED:	
		DRAWN: pengsne	07/18/2020
PART NO. WKTK-15J-5S-CN	REV. *	LINCONN Linconn Elc Tech Co.,LTD	